


SE-XL 600/1000 V Unarmoured Single Conductor (LSZH), XLPE/SHF1

SE-XL 600/1000 V unarmoured single core cables are suitable for use in offshore oil and gas, shipboard and marine applications. Our cables are made to IEC specifications and can be modified to fit your specific requirements.

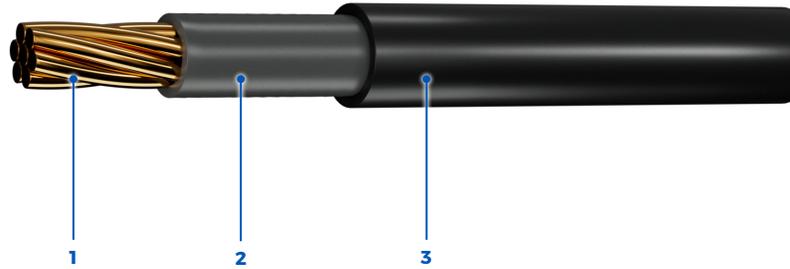

- 1 - Stranded Bare or Tinned Class 2 or Class 5 Copper Conductors
- 2 - XLPE Insulated Conductors
- 3 - Protective LSZH Outer Sheath

Standards:



Operating Temperature

-40°C to +90°C

Product Construction

Conductor:

- Stranded bare or tinned copper class 5 (standard) or class 2 (optional)

Insulation:

- XLPE Rated: +90°C Wet/Dry, IEC 60092-360

Jacket:

- FR LSZH Thermoplastic, IEC 60092-360 (SHF1)

Available in:

- Custom insulation/ jacket colours

Certification/Compliances

Construction & Materials:

- IEC 60092-353
- IEC 60092-350
- IEC 60092-360 (Insulation & Sheath)
- IEC 60228 (Conductor)

Performance:

- IEC 60332-1-2 (Flame Retardancy)
- IEC 60754-1 & 2, IEC 60684-2 (Halogen Free)
- IEC 61034-1 & 2 (Low Smoke Emission)
- Cold Bend & Impact (-40°C/-35°C)

Approvals:

- American Bureau of Shipping (ABS)
- Lloyd's Register
- Transport Canada

600/1000 V

Voltage

Colour Coding

- Black conductor (standard)

Power and Control

SE-XL 600/1000 V Unarmoured Single Conductor (LSZH), XLPE/SHF1

NUMBER OF CONDUCTORS	X	SIZE OF CONDUCTORS	NOMINAL OD OVERALL CABLE	CABLE WEIGHT	AMPACITY	SHAWFLEX PART NUMBER
<i>(c)</i>		<i>(mm²)</i>	<i>(in/mm)</i>	<i>(lbs/1000ft) / (kg/km)</i>	<i>(45°C ambient)</i>	
1c	x	1	0.2 / 5.1	28 / 41.66	18	SE010E0101F0800
1c	x	1.5	0.2 / 5.4	32.93 / 49	23	SE010E3A01F0800
1c	x	2.5	0.2 / 5.8	41.4 / 61.61	30	SE010E5A01F0800
1c	x	4	0.3 / 6.4	53.27 / 79.28	40	SE010E0401F0800
1c	x	6	0.3 / 7.1	69.7 / 103.72	52	SE010E0601F0800
1c	x	10	0.3 / 7.8	97.86 / 145.64	72	SE010E1001F0800
1c	x	16	0.4 / 9.6	151.04 / 224.77	96	SE010E1601F0800
1c	x	25	0.5 / 11.5	224.13 / 333.55	127	SE010E2501F0800
1c	x	35	0.5 / 12.7	288.19 / 428.88	157	SE010E3501F0800
1c	x	50	0.6 / 14.1	390.63 / 581.32	196	SE010E5001F0800
1c	x	70	0.7 / 16.7	532.82 / 792.93	242	SE010E7001F0800
1c	x	120	0.8 / 20.5	859.43 / 1278.97	339	SE010E1C01F0800

*Ampacity value based on ABS Rules for Building and Classing Steel Vessels, Version 2023, Table-6. Values are corrected according to Table 6 for number of Conductors.

**Available in both American Wire Gauge (AWG) and Metric wire conductor sizes